


SmallRig

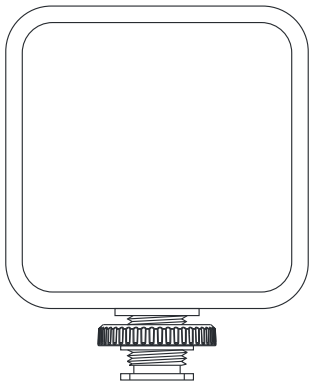

Vibe P96 LED Video Light Vibe P96 LED 补光灯

Operating Instruction / 操作指引

Thank you for purchasing SmallRig's product.
感谢您购买SmallRig产品。

Warnings / 重要提示

- Please read this User Manual carefully.
 - Do not use the product in water because it is not dust or water proof.
 - Do not let the product fall to the ground, be hit or suffer violent impact.
 - Do not use the product in the completely closed environment, or it may lead to rise of internal temperature, which causes product failure, ignition or other accident.
 - Do not look straight at the LED bead in use from close range, or it may cause visual impairment.
 - Do not place the product nearby any combustible or volatile solution, or it may cause a fire disaster or smog.
 - Be sure to power the product off when it is not in use.
 - Never remove the non-detachable lithium battery without permission.
 - Do not pick up the camera by grabbing the holder of the filling light.
 - When the battery is not in use for a long time, please charge and discharge the battery every 6 months, and provide it with about 60% of the electric quantity to prolong its use life.
 - Since there are some hazardous substances in the battery, please do not discard it. Instead, dispose of the product that is damaged or will never be used according to the waste management measures.
-
- 请认真阅读本用户手册。
 - 请勿在水中使用，本产品不具备防尘、防水功能。
 - 请勿让产品掉落到地面、受到碰撞或强烈冲击。
 - 请勿在完全封闭的环境下使用，否则可能使内部温度升高而导致产品故障、起火或意外事故。
 - 请勿近距离直视使用中的LED灯珠，否则可能使视力受损。
 - 请勿将产品放置在可燃或易挥发的溶液附近，否则可能引发火灾或产生烟雾。
 - 此产品使用完毕后务必将产品关机。
 - 本产品内置式不可拆卸锂电池，严禁擅自拆机。
 - 切勿抓住补光灯的灯头拿起摄像机。
 - 电池在长时间储存不用时，应在6个月内进行一次充放电维护，并恢复60%左右的带电量，以延长电池的使用寿命。
 - 电池内部有少许有害物质，请勿任意丢弃，请将损坏或是不再使用的产品，依照废弃物管理办法回收处理。



Please do not disassemble the product or change its battery. If you have any question, please contact the seller to apply after-sales service.

请勿拆卸产品或更换电池,如果您怀疑产品有任何问题,请联络购买平台,申请售后处理。



In the Box / 包装清单

Vibe P96 LED Video Light	× 1	Vibe P96 LED 补光灯	× 1
USB-C Charging Cable	× 1	USB-C 充电线	× 1
Operating Instruction	× 1	操作指引	× 1

Specifications / 产品参数

Product Model 产品型号	P96
Color Temperature 色温	2700K ~ 6500K
100% Light Flux / Lm Cold Light 100%光通量 / Lm	Cold Light: 240 Warm Light: 240 Chromatic Light: 240 冷光:240 暖光:240 变色光:240
Color Rendering Index 显色指数	≥95
Maximum Power Consumption 最大功耗	5W
Battery Specification 电池规格	2200mAh / 3.7V / 8.14Wh
Compensatory Range 补光射程	≤5m
Lamp Beads 灯珠数量	96
Volume 体积(长×宽×高)	72 × 89 × 31.6mm
Operating Temperature 工作温度	-10°C ~ 50°C
Input 输入	5V ■ 1A

Product Details / 产品介绍



- | | | |
|-------------------|---------------------------------------|----------------------------------|
| ① On / Off Button | ② The Indicator Light | ③ Adjust / Press the Knob Button |
| ④ Charging Port | ⑤ Fixed Screw Hole ($\Phi 1/4$ inch) | ⑥ Hot Boot Interface |
| ① 开 / 关机键 | ② 指示灯 | ③ 调节旋钮键 / 按键 |
| ④ 充电接口 | ⑤ 固定螺丝孔 ($\Phi 1/4$ 英寸) | ⑥ 冷靴接口 |

Note: the brightness and color temperature of the light can be adjusted when the non-polar knob is clockwise/counterclockwise. When the key is pressed toggle the color temperature or brightness adjustment.

注:无极旋钮顺时针 / 逆时针旋转时,可以调节灯的亮度和色温。当按下按键时则切换色温或亮度调节。

This product Vibe P96 LED video light adopts 2700K ~ 6500K LED light source. Click to adjust the color temperature, knob switch can adjust the brightness.

本产品P96补光灯采用了2700K~6500K LED光源,单键可以调色温、亮度,是视频拍摄的理想配件,另外还可以用于手机自拍补光、直播照明、户外照明等使用环境。

Installation Instructions for LED Video Light

补光灯安装说明



When the fill-up light is installed on the camera, SLR, and tripod

1. Insert the cold shoe adapter of the LED video light directly into the camera mount and tighten it clockwise.
2. Tighten the screw hole at the joint of the cold shoe connection at the bottom of the light and the screws on the tripod, then adjust the proper Angle of the light for light filling operation.

当补光灯安装到摄像机、单反相机和三脚架时

- 1、直接将补光灯的冷靴滑入相机热靴座，顺时针拧紧加固。
- 2、把补光灯底部冷靴接口处的螺丝孔和三角架上的螺丝拧紧即可，调整补光合适的角度进行补光作业。



Product function description and characteristics

产品功能说明及特性

1. This product is made of LED lamp beads with 2 kinds of color temperature (48 for each). Large power, small heating, long service life.
2. Infinite brightness adjustment, adjust the brightness of light, the use of light more professional.
3. Double color temperature adjustable, can set different atmosphere effect, such as sunrise and sunset.
4. Built-in high capacity 2200mAh lithium battery, let you use more durable, more convenient.
5. Projection different lighting effects in different environments to add more fun to your shooting.

- 1、本产品采用2种色温(各48颗)的LED灯珠组合而成。功率大,发热小,使用寿命长。
- 2、亮度无极调节,调节光线明亮度,光线运用更专业。
- 3、双色温无极调节,可设置不同氛围效果,如日出日落。
- 4、内置大容量2200mAh锂电池,让你使用更持久,更方便。
- 5、在不同的环境下投射出不同的灯光效果,为您的拍摄增加更多乐趣。

Directions for use

使用说明

1. Switch / lighting button

press the button to switch the machine on and off; Long press to enter the lighting state (maximum brightness)

2. Indicator lights

5 LED indicator lights (1 green and 4 white):

White light: 4 white indicator lights show power

4 lights on, the battery is 100%

3 lights on, the battery is 75%

2 lights on, the battery is 50%

1 light on, charge is 25%

low power indication, the last white light flashing

full of 4 white lights always on

Green light: the green light flashes, when the mode is to adjust the color temperature state,
The green light is always on, when the mode is in the brightness state.

3. Lighting mode

long press the switch button to enter the lighting mode directly under the power-on state. In this mode, all LED lights reach maximum brightness.

4. Color temperature adjustment

press the knob button, rotate the knob button to adjust the color temperature of the supplement light. The adjustable range is 2700K ~ 6500K.

5. Brightness adjustment

press the knob button and rotate the knob button to adjust the brightness of the filling light.

1. 开 / 关机键

短按  键开启或关闭设备, 长按进入照明状态 (达到最亮)。

2. 指示灯

LED指示灯5颗 (1绿4白) :

白灯: 4颗白色指示灯显示电量

4颗灯亮, 电量为100%

3颗灯亮, 电量为75%

2颗灯亮, 电量为50%

1颗灯亮, 电量为25%

低电提示, 最后1颗白灯闪烁

充电闪烁, 充满4颗白灯常亮

绿灯: 绿灯闪烁, 当前模式为调节色温状态

绿灯常亮, 当模式在调节亮度状态。

3. 照明模式

在开机的状态下, 长按开关按键, 即可直接进入照明模式。在此模式下, 所有LED灯达到最亮。

4. 色温调节

短按旋钮键, 旋转旋钮键, 即可调节补光灯的色温, 可调范围2700K ~ 6500K。

5. 亮度调节

短按旋钮键, 旋转旋钮键, 即可调节补光灯的亮度。

Service & Warranty

Please keep your original receipt and guarantee card. Be sure the dealer has written on it the date of purchase and SN of the product. These are required for warranty service.

After-sale Warranty Terms

SmallRig products are entitled to warranty services as of the date of payment.

- Electronic products (except V mount battery): 1-year warranty.
- V mount battery: 2-year warranty.
- Non-electronic products: 2-year warranty.

Note: In case of any conflict between our warranty period policy and applicable laws and regulations of the country / region where the products are sold, the latter shall prevail.

This Warranty Does Not Cover

1. If users fail to adhere to the "Operating Instruction" or any "Warnings" stated in the user manual, resulting in a quality failure, it falls outside the scope of warranty coverage.
2. The product identification or SN label is removed or defaced in any way.
3. Product damage caused by problems not attributable to the quality of the products such as improper use of the products.
4. Product damage caused by unauthorized modification, disassembly, repair and other acts.
5. Product damage caused by fires, floods, lightning and other force majeure factors.

Warranty Mode

- For the products within the scope of warranty, SmallRig will repair or replace them on the basis of specific failures; the repaired / replaced products / parts are entitled to the remaining part of the original warranty period.

Contact Information

- You're advised to contact the online customer service personnel of corresponding shopping platform and submit a repair service application.
- You may also apply for repair service through SmallRig's service email.

Service Email: support@smallrig.com

保修条款

请保留您的原始购买单据及保修卡,同时包含您的购买日期、产品序列号等,这些资料质保服务时均需要提供。

售后质保条款

SmallRig产品自下单付款之日起享有质保服务。

- 电子产品(除V口电池): 1年质保。
- V口电池: 2年质保。
- 非电子产品: 2年质保。

注:若销售地国家或地区的适用法律法规有冲突的,以销售地国家或地区有关质保期的法律法规为准。

质保无效说明

1. 当用户违反操作指引或用户手册中“重要提示”任何一条导致的质量失效,不在质保范围内。
2. 产品序列号标识已经被撕毁或无法辨识,不在质保范围。
3. 产品使用不当等非产品本身质量问题,而造成的产品损坏,不在质保范围。
4. 非官方指导的私自改装、拆解、维修等行为而造成的损坏,不在质保范围。
5. 因火灾、水灾、雷击等不可抗力造成的产品损坏,不在质保范围。

维修方式

- 属于质保范围的,SmallRig根据产品具体的故障对产品进行维修或更换;
- 维修后的产品/部件享受原有保修期的剩余时长。

联系方式

- 建议您优先前往相应购买平台联系在线客服,提出产品维修申请。
- 您也可以通过 SmallRig 服务邮箱申请维修服务。

服务邮箱: support@smallrig.com

Guarantee Card / 保修卡

ID No. / ID 编号	
Item Name / 产品名称	
Purchase Date / 购买日期	
User Name / 用户姓名	
Mobile / 用户电话	
Address / 用户地址	
Receipt / 购买单据	

EC	REP	Prolinx GmbH Brehmstr.56,40239 Duesseldorf Germany eu@euinlix.eu
----	-----	--

UK	REP	Prolinx Global LTD 27 Old Gloucester Street London, WC1N3AX, UK eu@euinlix.eu
----	-----	---

执行标准: GB 7000.1-2015

Manufacturer: Shenzhen Leqi Innovation Co., Ltd.

Add: Rooms 103, 501 and 601, Building 5, Fenghe Industrial Park, Nos. 1301-50 Guangguang Road, Longhua District, Shenzhen, Guangdong, China.

Consignor: Shenzhen LC Co., Ltd.

Add: Rooms 602, Building 5, Fenghe Industrial Park, No. 1301-50 Guangguang Road, Xinlan Community, Guanlan Street, Longhua District, Shenzhen, Guangdong, China.

制造商: 深圳市乐其创新股份有限公司

地址: 中国广东省深圳市龙华区观澜街道新澜社区观光路 1301-50 号丰和工业园厂房 5 栋 103、501、601

委托商: 深圳市乐长科技有限公司

地址: 中国广东省深圳市龙华区观澜街道新澜社区观光路 1301-50 号丰和工业园厂房 5 栋 602



ETICHETTATURA AMBIENTALE
ENVIRONMENTAL LABELING

Scan to obtain detailed
instruction manual information
扫一扫获取更详细的说明书信息

LQ-B045-18

中国制造
Made in China