


SmallRig

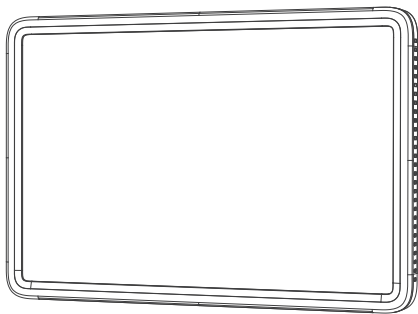

P200 Beauty Panel Video Light

User Manual

In order to ensure users' safety and prevent the product damages caused by any improper use, please read the "Warnings" carefully below and keep this User Manual properly for future reference.

Foreword

Thank you for purchasing SmallRig's product.
SmallRig P200 Beauty Panel Video Light is a simple, easy-to-operate, lightweight and portable LED video light, mainly used for indoor beauty live-streaming, still life photography, video conference, outdoor live-streaming, etc.


Warnings

- Do not exert pressure on its LCD screen because over pressure will cause permanent damage to the screen.
- Do not use the product in water because it is not dust or water proof.
- Do not let the product fall to the ground, be hit or suffered violent impact.
- Do not use the product in the completely closed environment, or it may lead to rise of internal temperature, which causes product failure, ignition or other accident.
- Do not leave the product in excessive heat, high temperatures can cause the product to malfunction.
- Do not place the product in a place where there are corrosive chemical to protect the product from corrosion, corrosion may cause the product to malfunction.
- Do not place the product nearby any combustible or volatile solution, or it may cause a fire disaster or smog.
- Be sure to power the product off when it is not in use.



Please do not disassemble the product, if you have any question, please contact the seller to apply after-sales service.

Product Outline

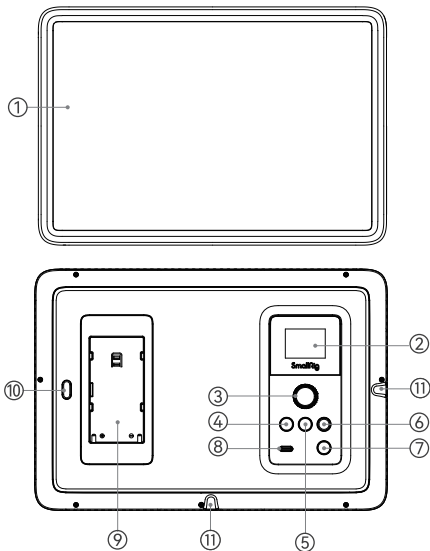

① PC Lampshade

② LCD Display Screen

③ VOLUME Knob

④ MODE Button

⑤ SET Button

⑥ BEAUTY-ON Button

⑦ Power Switch

⑧ USB-C Charging Interface

⑨ Lithium Battery Slot

⑩ Battery Slot Button


⑪ 1/4"-20 Threaded Hole

Power Supply


P200 Panel Light supports three power supply modes.

- **DC power supply:** You can use the standard power adapter (18W) or choose 5V \equiv 3A / 9V \equiv 2A / 12V \equiv 1.5A power connection.
- **Lithium battery power supply:** This product supports NP-F series lithium battery, lithium battery needs to be provided by yourself.

Installation method: Place a NP-F lithium battery in the lithium battery slot of the host. Align the socket end of the lithium battery with the positive and negative contacts in the slot, push down and clamp it tightly to complete the installation.




①



②

Removal method: Press and hold the button of the battery compartment, push the lithium battery upwards, so that the lithium battery is separated from the positive and negative contacts, and the lithium battery can be taken out.

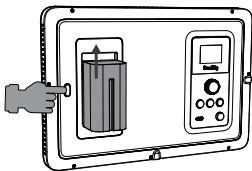

- **Power bank:** This product supports a power bank that can output USB-C 5V \equiv 3A / 9V \equiv 2A / 12V \equiv 1.5A.

Notice

1. This product does not contain a built-in battery, and cannot charge an external NP-F lithium battery.
2. The screen can display the remaining power of the external NP-F lithium battery, but due to the uneven quality of lithium batteries on the market, there will be a certain proportion of deviation between the power display and the actual remaining power of the battery, please understand.
3. Due to the small battery capacity of the NP-F550, when the product is working at full power, the NP-F550 will automatically enter the protection state and stop working. Please turn down the brightness to use it normally.

Product Instructions

Power ON / OFF

- Connect the standard power adapter to the power supply (or use NP-F series lithium battery for power supply).
- Press the Power Switch, the button will be self-locked, and the product will be turned on.
- Press the Power Switch, the button will pop up, and the product will shut down.

Common Mode

Press the MODE button to change mode among CCT / FX.

CCT Mode

Press the SET button to switch the color temperature and brightness options, and use the VOLUME knob to adjust the color temperature and brightness. Rotate to the right to increase the value, to the left to decrease the value.

Color temperature adjustable range: 2500K ~ 6500K, brightness adjustable range: 1% ~ 100%.

FX Mode

Press the SET button to switch the scenario effects and brightness options, and use the VOLUME knob to adjust the scenario effects order and brightness. Rotate to the right to increase the value, to the left to decrease the value.

Brightness adjustable range: 1% ~ 100%.

Scenario Effects List:

- | | | |
|-------------|--------------|--------------|
| ① Lightning | ④ Fault Bulb | ⑦ Paparazzi |
| ② TV | ⑤ Pulsing | ⑧ Emergency |
| ③ Candle | ⑥ Strobe | ⑨ H / L Beam |

BEAUTY-ON Mode

- Press the BEAUTY-ON button to enter the BEAUTY-ON mode.
- Setting Method: Under the CCT mode, Adjust your wanted color temperature and brightness via the VOLUME knob. When adjusting to the ideal light effect you like, you can press and hold the BEAUTY-ON button for 2 seconds to store and memorize the current setting.
- In subsequent use, press the BEAUTY-ON button to quickly switch to the light effect of your custom settings.

Product Specifications

Power	15W
Lamp Beads	192pcs (White 96pcs + Warm 96pcs)
Color Temperature	2500K ~ 6500K
Ra / CRI	98+
TLCI	98+
Illuminance	2000Lux / 0.3m
Input	USB-C 5V \square 3A / 9V \square 2A / 12V \square 1.5A
Compatibility	1/4"-20 Screw
Working Temperature	-10°C ~ 45°C
Material (s)	ABS
Product Dimension	254 × 174 × 16mm
Working Height (Max)	400g

Notes on Temperature Warning

1. Product is used in an environment with a high ambient temperature, or if the product is used continuously for a long period of time. This will automatically turn off the product until it cools down.
2. Product is used in an environment with a low ambient temperature. In such environments, the product may not operate properly.

Service & Warranty

Please keep your original receipt and guarantee card. Be sure the dealer has written on it the date of purchase and SN of the product. These are required for warranty service.

After-sale warranty terms

1. 7 Days DOA Return Policy: Within 7 days from the date of the package receipt, return or replacement can be done if the item received is malfunctioning or physical damaged (not caused by human abused), return shipping cost will be on SmallRig's charge.

2. SmallRig products are entitled to warranty services as of the date of payment.

- Electronic products (except V mount battery): 1-year warranty, 1-year free maintenance.
- V mount battery: 2-year warranty, 2-year free maintenance.
- Non-electronic products: 2-year warranty, 2-year free maintenance.

Note: In case of any conflict between our warranty period policy and applicable laws and regulations of the country / region where the products are sold, the latter shall prevail.

This warranty does not cover

1. If users fail to adhere to the any "Warnings" stated in the user manual, resulting in a quality failure, it falls outside the scope of warranty coverage.
2. The product identification or SN label is removed or defaced in any way.
3. Product damage caused by problems not attributable to the quality of the products such as improper use of the products.
4. Product damage caused by unauthorized modification, disassembly, repair and other acts.
5. Product damage caused by fires, floods, lightning and other force majeure factors.

Warranty Mode

- For the products within the scope of warranty, SmallRig will repair or replace them on the basis of specific failures; the repaired / replaced products / parts are entitled to the remain-ing part of the original warranty period.

Contact Information

- You're advised to contact the online customer service personnel of corresponding shopping platform and submit a repair service application.
- You may also apply for repair service through SmallRig's service email.

Service Email: support@smallrig.com

For more support information: www.smallrig.com/support

Guarantee Card

ID No.	
Item Name	
Purchase Date	
User Name	
Mobile	
Address	
Receipt	



Prolinx GmbH
Brehmstr.56,40239 Duesse|dorf Germany
eu@eulinx.eu



Prolinx Global LTD
27 Old Gloucester Street London,
WC1N3AX, UK eu@eulinx.eu

Manufacturer: Shenzhen Leqi Network Technology Co., Ltd.
Add: Rooms 103, 501 and 601, Building 5, Fenghe Industrial Park, Nos. 1301-50
Guanguang Road, Longhua District, Shenzhen, Guangdong, China.

Consignor: Shenzhen LC Co., Ltd.
Add: Rooms 602, Building 5, Fenghe Industrial Park, No. 1301-50 Guanguang Road,
Xinlan Community, Guanlan Street, Longhua District, Shenzhen, Guangdong, China.

CE FCC RoHS



www.smallrig.com

Made in China



WE ARE HERE FOR YOU
服务与支持



ETICHETTATURA AMBIENTALE
ENVIRONMENTAL LABELING